

1/2"管道总成

1/2" PIPELINE ASSEMBLY

主管道为1/2" 的专用流体管及管件。
The main pipeline is equipped with 1/2" special fluid pipe and pipe fittings.



三通
T-joint

外丝直通
Screwed joint

直通
Connector

弯通
Elbow connector

总成型号 Model 58000



高压球阀
High-pressure adjusting valve

过滤器
Filter

支架
Rack

管道
Pipeline

型号 Model	58204	58203	58202	58201	58106	38021	58303	58406
总成构件 Assembly components	弯通 Elbow connector	外丝直通 Screwed joint	直通 Connector	三通 T-joint	高压球阀 High-pressure adjusting valve	过滤器 Filter	支架 Rack	管道 Pipeline

1"管道总成

1" PIPELINE ASSEMBLY

主管道为1" 的专用流体管及其管件。
The main pipeline is equipped with 1" special fluid pipe and pipe fittings.



三通
T-joint

外丝直通
Screwed joint

直通
Connector

弯通
Elbow connector

总成型号 Model 58001
58000



高压球阀
High-pressure adjusting valve

过滤器
Filter


支架
Rack

管道
Pipeline

型号 Model	58208	58207	58206	58205	58110	38021	58303	58410
总成构件 Assembly components	弯通 Elbow connector	外丝直通 Screwed joint	直通 Connector	三通 T-joint	高压球阀 High-pressure adjusting valve	过滤器 Filter	支架 Rack	管道 Pipeline

GREASE FILLING EQUIPMENT

黄油加注设备

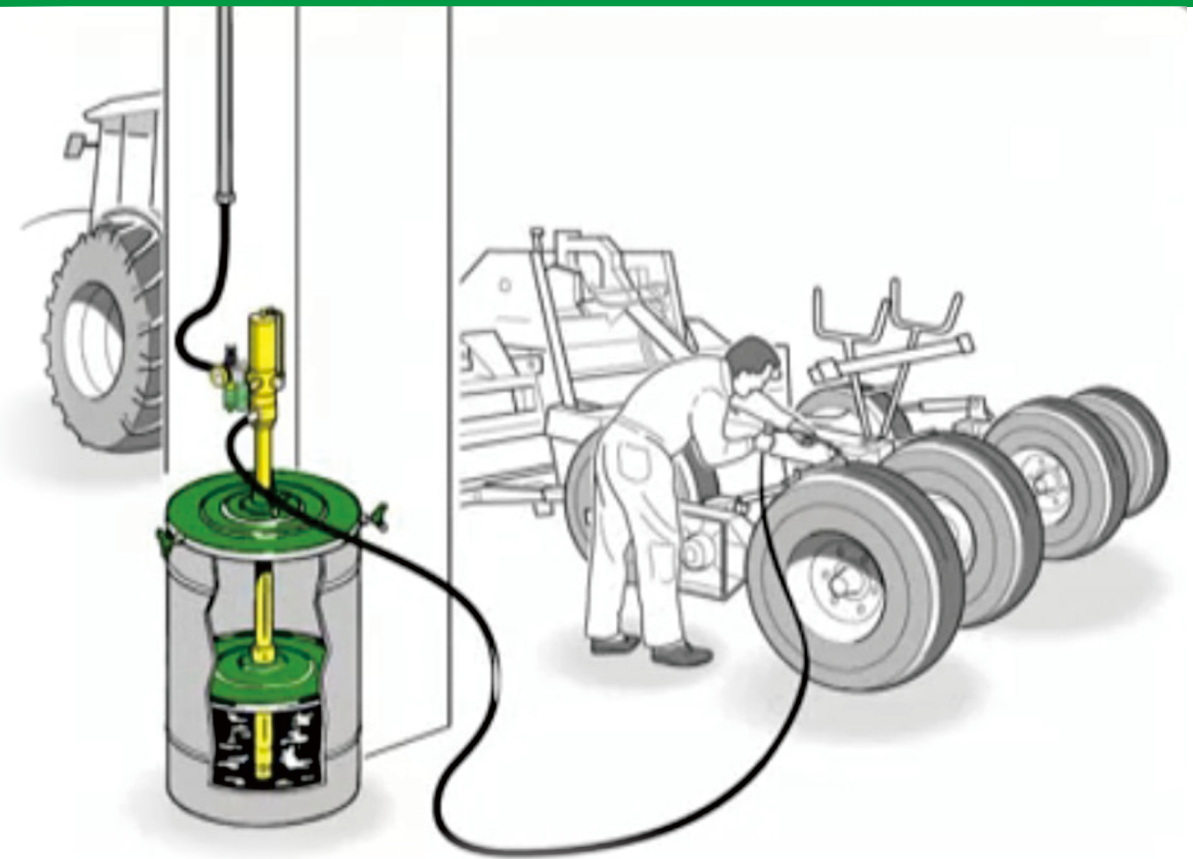

气动黄油泵

比率 Ratio: 50:1 500g/min

AIR-OPERATED GREASE PUMP

比率50:1 的黄油泵。
The air-operated pumps (Ratio 50:1) is used for high-pressure greasing. Ideal for pumping to transfer grease and high-viscosity oil.

技术参数
Technical parameters

型号 Model	62041	62048	62074	62095
比率 Ratio	50: 1	50: 1	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min	500g/min	500g/min
吸油管长 Length of pumping tube	410mm	480mm	740mm	940mm
吸油管径 Diameter of pumping tube	32mm	32mm	32mm	32mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm	1345*190*155mm	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	3.5kg	4.2kg	4.6kg	5.1kg

气动黄油泵

比率Ratio: 48:1 800g/min

AIR-OPERATED GREASE PUMP

比率48:1 的气动黄油泵，流量更大。
The air-operated pumps (Ratio 48:1) is used for high-pressure greasing with big flow rate.

技术参数
Technical parameters

型号 Model	62141	62174	62195
比率 Ratio	48: 1	48: 1	48: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar
耗气量 Average air consumption	350L/min	350L/min	350L/min
输送速度 Flow rate	500g/min	500g/min	500g/min
吸油管长 Length of pumping tube	410mm	740mm	940mm
吸油管径 Diameter of pumping tube	32mm	32mm	32mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	8.2kg	8.7kg	9.2kg

工业黄油泵

比率Ratio: 50:1 5500g/min

INDUSTRIAL GREASE PUMP

比例 50:1 的工业黄油泵，可持续不间断工作，流量更大的气动黄油泵。

The industrial air-operated pumps (Ratio 50:1) is used for high-pressure greasing with bigger flow rate,The high quality of the materials used ensure the lasting and reliable operation.

技术参数
Technical parameters

型号 Model	62341	62395
比率 Ratio	50: 1	50: 1
进气嘴接头 Air inlet connection	1/2"	1/2"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	4-8bar	4-8bar
最大压力 Maximum pressure	10bar	8bar
耗气量 Average air consumption	1800L/min	1800L/min
输送速度 Flow rate	5500g/min	5500g/min
吸油管长 Length of pumping tube	410mm	940mm
吸油管径 Diameter of pumping tube	45mm	45mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	13.2kg	17.3kg

手动黄油加注机

MANUAL GREASE DISPENSER KITS

使用手压式黄油泵，带有容器的黄油加注机或不带容器的套件。

The ideal combination for dispensing grease in any workplace. The mobile kits are equipped with manual grease pump, filling hose etc. The container with wheels is an option at your need.


技术参数
Technical parameters

型号 Model	68012	68022
输油压力 Filling pressure	130-140bar	130-140bar
吸油管长 Length of pumping tube	410mm	410mm
吸油管径 Diameter of pumping tube	32mm	32mm
随动板直径 Diameter of follower plate	265mm	265mm
桶盖直径 Diameter of drum cover	-	285mm
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	1/4"	1/4"
罐体容量 Tank capacity	13L	-
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	380*340*890mm	400*380*640mm
产品重量 Gross weight	10kg	8kg

壁装式黄油泵加注套件

WALL-MOUNTED GREASE DISPENSING KITS

适用于180-220kg 油桶的壁装式黄油加注套件。
The wall-mounted grease dispensing kit is suitable for 180~220KG drums.

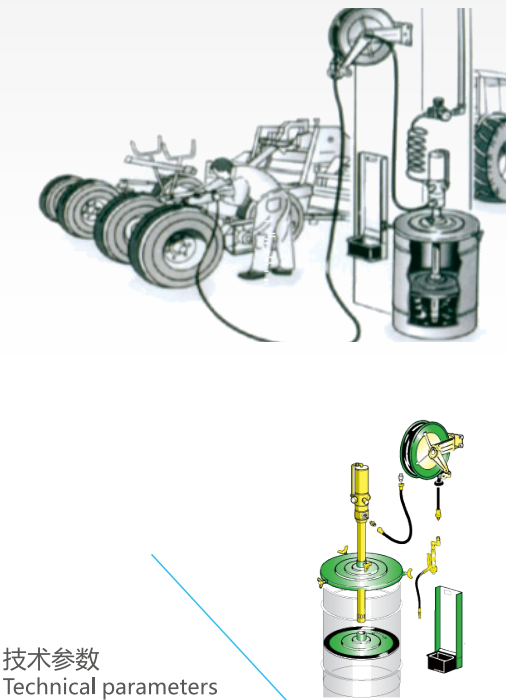


技术参数
Technical parameters

型号 Model	63110	63115
比率 Ratio	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	32mm	32mm
卷管器型式 Type of hose reel	重型旋转式	重型旋转式
卷管器出油管长 Length of outlet reelpipe	10m	15m
卷管器进油管长 Length of inlet reelpipe	1.5m	1.5m
卷管器管径 Diameter of reelpipe	1/4"	1/4"
黄油枪口径 Diameter of grease gun nozzle	1/8"	1/8"
随动板直径 Diameter of follower plate	590mm	590mm
桶盖直径 Diameter of drum cover	600mm	600mm
挂枪架尺寸 Grease gun rack size	150*210*605mm	150*210*605mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	635*635*145mm	635*635*145mm
包装尺寸2 Packing size_2	565*545*245mm	565*545*245mm
包装尺寸3 Packing size_3	1335*180*145mm	1335*180*145mm
产品重量 Gross weight	39.7kg	40.7kg

重型移动式黄油加注套件

HEAVY-DUTY MOBILE GREASE DISPENSING KITS

适用于180-220kg油桶，带拖车的黄油加注套件。
The mobile grease dispensing kit is equipped with the compact trolley, suitable for 180~220KG oil drum.

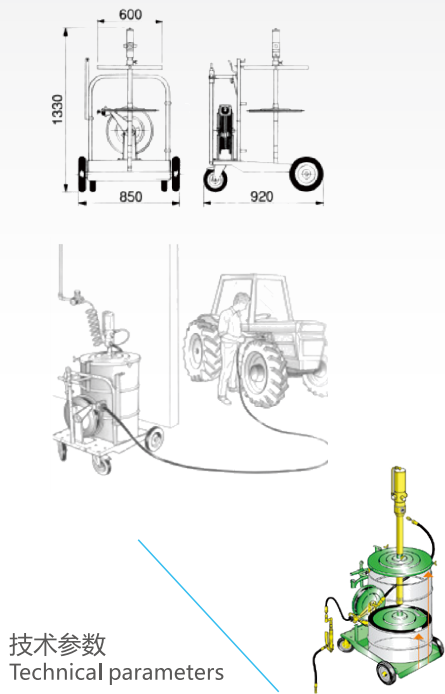



技术参数
Technical parameters

型号 Model	64000	64070
比率 Ratio	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	32mm	32mm
卷管器型式 Type of hose reel	重型固定式	-
卷管器出油管长 Length of outlet reelpipe	10m	-
卷管器进油管长 Length of inlet reelpipe	1.5m	-
卷管器管径 Diameter of reelpipe	1/4"	-
黄油枪口径 Diameter of grease gun nozzle	1/8"	1/8"
随动板直径 Diameter of follower plate	590mm	590mm
桶盖直径 Diameter of drum cover	600mm	600mm
拖车适用油桶 Suitable for drums	180-220L	180-220L
输油软管管长 Length of filling hose	-	5m
输油软管管径 Diameter of filling hose	-	1/4"
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	870*700*115mm	870*700*115mm
包装尺寸2 Packing size_2	1335*180*145mm	1335*180*145mm
包装尺寸3 Packing size_3	625*625*125mm	625*625*125mm
包装尺寸4 Packing size_4	565*545*245mm	-
产品重量 Gross weight	62.7kg	44kg

手推车式黄油加注套件

MOBILE GREASE DISPENSING KITS

适用于20-60kg 油桶，带手拖车的黄油加注设备套件。
The mobile grease dispensing kit is equipped with the wheels, suitable for 20~60KG oil drum.



技术参数
Technical parameters




型号 Model	64035	64038	64041
比率 Ratio	50: 1	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min	500g/min
吸油管长 Length of pumping tube	480mm	740mm	740mm
吸油管径 Diameter of pumping tube	32mm	32mm	32mm
黄油枪口径 Diameter of grease gun nozzle	1/8"	1/8"	1/8"
随动板直径 Diameter of follower plate	310mm	370mm	400mm
桶盖直径 Diameter of drum cover	310mm	350mm	385mm
拖车适用油桶 Suitable for drums	18-60L	18-60L	18-60L
输油软管管长 Length of filling hose	4m	4m	4m
输油软管管径 Diameter of filling hose	1/4"	1/4"	1/4"
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	465*465*145mm	635*635*145mm	635*635*145mm
包装尺寸2 Packing size_2	1020*220*100mm	1345*190*155mm	1345*190*155mm
包装尺寸3 Packing size_3	540*490*190mm	540*490*190mm	540*490*190mm
产品重量 Gross weight	25.6kg	26.6kg	27.6kg

便携式黄油加注套件

PORTABLE GREASE DISPENSING KITS

适用于 12-40kg油桶，方便携带的黄油加注套件。
The portable grease dispensing kit is suitable for 12~40KG oil drum.



64031



技术参数
Technical parameters




型号 Model	64021	64031
比率 Ratio	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min
吸油管长 Length of pumping tube	410mm	410mm
吸油管径 Diameter of pumping tube	32mm	32mm
黄油枪口径 Diameter of grease gun nozzle	1/8"	1/8"
随动板直径 Diameter of follower plate	265mm	310mm
桶盖直径 Diameter of drum cover	280mm	310mm
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	1/4"	1/4"
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	465*465*145mm	465*465*145mm
包装尺寸2 Packing size_2	1020*220*100mm	1020*220*100mm
产品重量 Gross weight	12kg	13kg

带有容器及气动黄油泵的加注机

WITH CONTAINER AND AIR-OPERATED GREASE DISPENSER

带有容器及气动黄油泵的加注机。
The dispensing device is equipped with air-operated greasu pump and container.

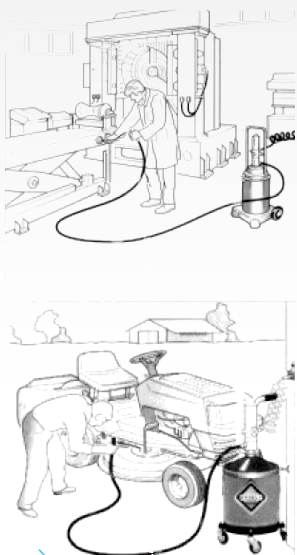

技术参数
Technical parameters

型号 Model	68213	68240
比率 Ratio	50: 1	50: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/4"	1/4"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min
输送速度 Flow rate	500g/min	500g/min
吸油管长 Length of pumping tube	410mm	410mm
吸油管径 Diameter of pumping tube	32mm	32mm
黄油枪口径 Diameter of grease gun nozzle	1/8"	1/8"
随动板直径 Diameter of follower plate	265mm	370mm
桶盖直径 Diameter of drum cover	-	385mm
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	1/4"	1/4"
罐体容量 Tank capacity	13L	40L
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	350*290*860mm	450*430*860mm
产品重量 Gross weight	15kg	17.8kg



气动黄油枪

AIR-OPERATED GREASE GUN

用途多样的各式气动黄油加注枪。


Various grease gun with flexible terminal / rigid nozzle.



口径: 1/8"
Inlet 1/8"

配置表

型号 Model	66860	66880	66888	66661	66663
参数	带有软管的注油枪 Grease control valve with hose	注油枪带有一个160 毫米金属管 Grease control valve with 160mm cranked steel pipe.It is preset to receive straight swivel or "Z" swivel	注油枪并带有一个旋转接头 Grease control valve with outletflexible/cranked straight swivel.	旋转接头 MF1/4 英寸. 当管路系统处于压力下时也能轻易接到枪上 Straight swivel MF 1/4It allows an easy rotation of the gun even when all thesystem is under pressure.	"z"型旋转接头 MF1/4 英寸. 当管路系统处于压力下时, 也能轻易接到枪上. "z" swivel MF 1/4, it allows an easy rotation of the gun even when all the system is under pressure.



油桶盖

DRUM COVER



配置表 Configuration table

型号 Model	65240	65280	65310	65350	65385	65420	65600	型号 Model	91401	91402	91403	91404	91405	91406	91408	91410	91415
直径 Diameter (mm)	240	280	310	350	385	420	600	管长 Length	15m	15m	15m	4m	5m	6m	8m	10m	15m

1/4 "软管套件

1/4" hose kit

均含有两个 1/4" 外牙接头
The hose kit is equipped with 2 pcs of thread connector.



随动板

Follower plate



型号 Model	66220	66265	66310	66340	66370	66400	66590
直径 Diameter (mm)	220	265	310	340	370	400	590
适合油桶内径 For drums internal diameter φ (mm)	190-210	235-255	280-300	310-330	340-360	370-390	560-580