



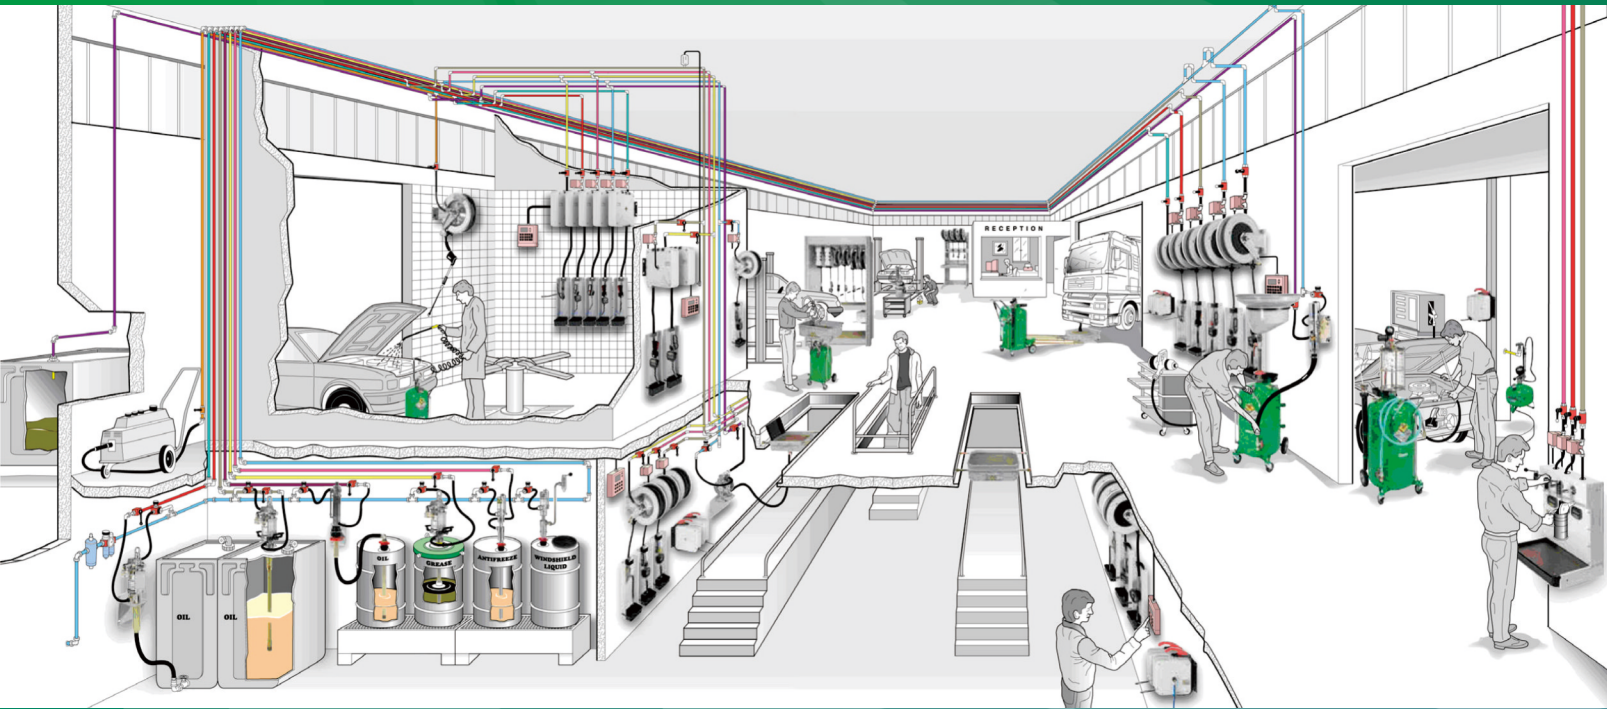

手压式注油机

MANUAL OIL DISPENSER

使用手压注油泵机型，不锈钢罐体，适用于高浓度油品。
The model equipped with the manual pump, is suitable for oils in high-concentration, stainless steel tank.

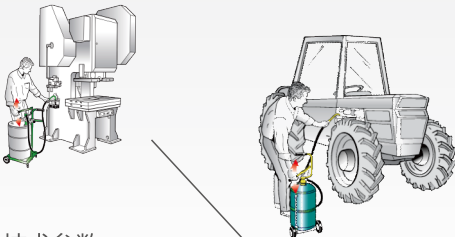

技术参数
Technical parameters


型号 Model	32173	32194	32025	32071
单次注油量 Injection flow/ cycle	50mL	50mL	50mL	50mL
吸油硬管管长 Length of pumping tube	740mm	940mm	410mm	740mm
吸油硬管管径 Diameter of pumping tube	37mm	37mm	37mm	37mm
输油软管管长 Length of filling hose	-	2m	2m	2m
输油软管管径 Diameter of filling hose	-	18mm	18mm	18mm
球阀口径 Diameter of ball valve	G1/4	-	-	-
罐体容量 Tank capacity	-	-	24L	72L
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1170*145*110mm	1170*150*110mm	390*300*880mm	485*485*830mm
产品重量 Gross weight	3.5kg	4kg	9kg	20.3kg



气压式注油机

AIR OPERATED OIL DISPENSER

使用空气压迫式加注机油，不锈钢罐体，适用于机油、齿轮油等油品。
Filling oil with compressed air, stainless steel tank, suitable for engine oil and gear oil etc.



技术参数
Technical parameters

型号 Model	33025	33071
输油软管管长 Length of filling hose	2m	2m
输油软管管径 Diameter of filling hose	13mm	18mm
工作压力 Air working pressure	< 4bar	< 4bar
油品粘度 Max deliverable oil viscosity	80SAE	80SAE
罐体容量 Tank capacity	24L	70L
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	390*300*1050mm	485*485*900mm
产品重量 Gross weight	8.5kg	18kg



气动抽油泵

比率Ratio: 1: 1 流量Flow rate: 35L/min

AIR OPERATED PUMP

比率1: 1的气动泵，用于抽取浓度不高的流量要求较大的液体，如机油、废油、防冻液等。
Pneumatic pump with ratio of 1:1, used for pumping low concentration and high flow requirements Liquids such as engine oil, waste oil, antifreeze, etc.




型号 Model	33160	33194
比率 Ratio	1: 1	1: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	230L/min	230L/min
输送速度 Flow rate	35L/min	35L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	80SAE	80SAE
吸油管长 Length of pumping tube	270mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1130*190*155mm	1345*190*155mm
产品重量 Gross weight	4.4kg	6.5kg

壁装式吸油套件

WALL-MOUNTED PNEUMATIC PUMP KIT

比率1: 1的气动泵，用于抽取浓度不高的流量要求较大的液体，如机油、废油、防冻液等。
Pneumatic pump with ratio of 1:1, used for pumping low concentration and high flow requirements Liquids such as engine oil, waste oil, antifreeze, etc.

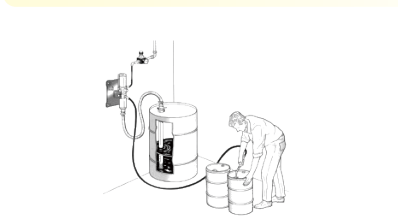


型号 Model	33100	33125
气动抽油泵 Air-operated oil pumps	33160	33160
支架孔径 Wall-bracket diameter	54mm	54mm
吸油软管管长 Length of suction hose	2m	2m
吸油软管管径 Diameter of suction hose	1"	1"
吸油硬管管长 Length of pumping tube	940mm	-
吸油硬管管径 Diameter of pumping tube	42mm	-
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*195*155mm	810*190*155mm
产品重量 Gross weight	6kg	5kg

气动抽油套件

DIAPHRAGM PNEUMATIC PUMP KIT

适合将容器内的油品抽空的壁装式气动泵套件。
The diaphragm transfer pumps are used in different kind of application. Ideal for transferring fluids out of tank/ drum/ other container.

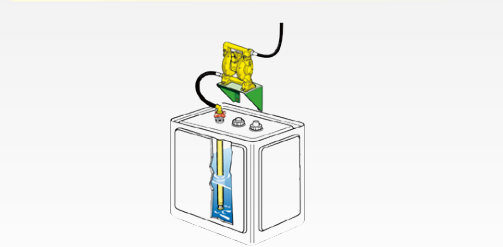

型号 Model	33500	33501
耗气量 Average air consumption	670L/min	670L/min
输送速度 Flow rate	50-60L/min	50-60L/min
最大压力 Max air-working pressure	8bar	8bar
吸油软管管长 Length of suction hose	-	2m
吸油软管管径 Diameter of suction hose	-	1"
吸油硬管管长 Length of pumping tube	-	940mm
吸油硬管管径 Diameter of pumping tube	-	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	328*265*418mm	328*265*418mm
产品重量 Gross weight	10.2kg	12.7kg



气动工业输油泵

比率Ratio: 5:1 流量Flow rate: 45L/min

PNEUMATIC INDUSTRIAL PUMP

可连续不断工作的工业级油泵，适用于高浓度油品远程输送及准确计量。

This industrial pump that ensures lasting and reliable operation even in extreme conditions, is the ideal for remotely pumping high viscosity and heavy fluids.

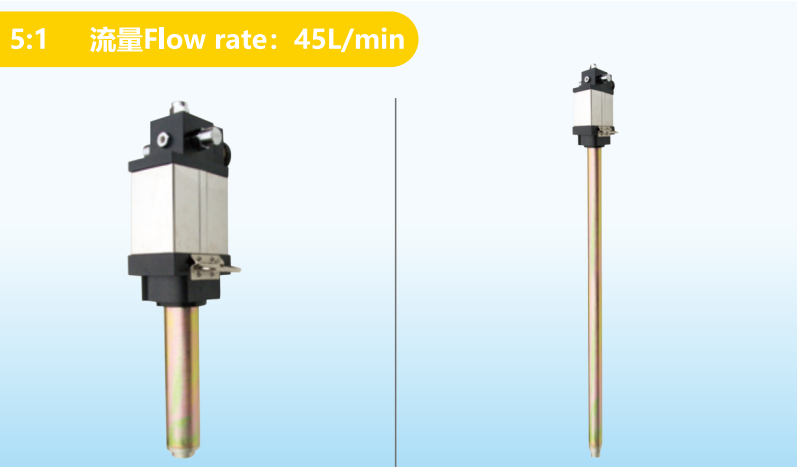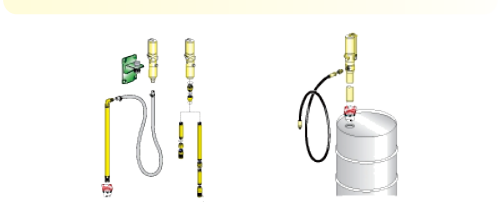

型号 Model	36660	36694
比率 Ratio	5: 1	5: 1
进气嘴接头 Air inlet connection	1/2"	1/2"
出油口接头 Fluid outlet connection	3/4"	3/4"
工作压力 Air working pressure	6-8bar	6-8bar
最大压力 Maximum pressure	10bar	10bar
耗气量 Average air consumption	1500L/min	1500L/min
输送速度 Flow rate	45L/min	45L/min
油温 Fluid temperature	-10-60°C	-10-60°C
吸油管长 Length of pumping tube	270mm	940mm
吸油管径 Diameter of pumping tube	70mm	70mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	810*300*155mm	1325*300*155mm
产品重量 Gross weight	13.3kg	15.5kg

气动输油泵

比率 Ratio: 3:1 流量 Flow rate: 14L/min

PNEUMATIC OIL TRANSFER PUMP

比率3:1的气动泵，适用于抽取并输送中高密度
 的机油和防冻液等。
 Pneumatic pump with ratio of 3:1, suitable for pumping
 and delivering medium to high density engine oil and
 antifreeze, etc.



型号 Model	35140	35160	35173	35194
比率 Ratio	3: 1	3: 1	3: 1	3: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	300L/min	300L/min	300L/min	300L/min
输送速度 Flow rate	12L/min	14L/min	14L/min	14L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	130SAE	130SAE	130SAE	130SAE
吸油管长 Length of pumping tube	400mm	270mm	740mm	940mm
吸油管径 Diameter of pumping tube	32mm	42mm	42mm	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	810*190*155mm	810*190*155mm	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	3.9kg	4.4kg	4.8kg	6.3kg

气动输油泵

比率 Ratio: 5:1 流量 Flow rate:18L/min

PNEUMATIC OIL TRANSFER PUMP

比率5:1的双向作用气动泵，适用于抽取并远程输
 送高浓度的油品，适合安装在集中供油系统中，此
 泵更适合于计量。

Double action pneumatic pump with ratio of 5:1, suitable
 for pumping and delivering high-concentration oil products
 remotely, suitable for installation in centralized oil supply
 systems, this pump is more suitable for metering.



型号 Model	36040	36060	36073	36094
比率 Ratio	5: 1	5: 1	5: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	320L/min	320L/min	320L/min	320L/min
输送速度 Flow rate	16L/min	18L/min	18L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	240SAE	240SAE	240SAE	240SAE
吸油管长 Length of pumping tube	400mm	270mm	740mm	940mm
吸油管径 Diameter of pumping tube	32mm	42mm	42mm	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	810*190*155mm	810*190*155mm	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	4.8kg	4.5kg	5.7kg	6.3kg

气动输油泵

比率Ratio: 5:1 流量 Flow rate: 27L/min

PNEUMATIC OIL TRANSFER PUMP

比率5:1的双向作用气动泵，适合准确计量，适用于抽取
 并远程输送高浓度的油品，适合安装在集中供油系统中。

Air-operated double-acting pumps RATIO 5:1, ideal for
 long distance distribution to transfer high viscosity and
 heavy fluids, This pumps guarantee high performance in
 flow metering, particularly effective in centralized oil
 supply system.



型号 Model	36340	36360	36373	36394
比率 Ratio	5: 1	5: 1	5: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	350L/min	350L/min	350L/min	350L/min
输送速度 Flow rate	24L/min	27L/min	27L/min	27L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	240SAE	240SAE	240SAE	240SAE
吸油管长 Length of pumping tube	400mm	270mm	740mm	940mm
吸油管径 Diameter of pumping tube	32mm	53mm	53mm	53mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	810*190*155mm	810*190*155mm	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	4.8kg	4.5kg	5.7kg	6.3kg

便携式注油套件

PORTABLE OIL TRANSFER KIT

可方便携带的，便于操作的注油套件。
Oil dispenser kit for drums or tanks. The ideal combination for dispensing oil in any workplace. The kit is equipped with digital oil gun, which make it easier to operate independently as oil delivery station.



技术参数
Technical parameters

型号 Model	37300	37350
气动输油泵比率 Pneumatic pump ratio	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	320L/min
输送速度 Flow rate	14L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	130SAE	240SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
注油枪型式 Oil gun series	数显注油枪 Digital oil gun	数显注油枪 Digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量精度 Measuring precision	±0.3%	±0.3%
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	3/8"	3/8"
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*145mm	1345*185*145mm
产品重量 Gross weight	9.7kg	11kg

壁装式输油套件

WALL-MOUNTED OIL TRANSFER KIT

适用于换油中心或集中供油系统套件。
Oil dispensing system with wall-mounted pump. The kits can be connected with centralized lube piping or digital oil gun, which make it easier to operate independently as oil delivery station.



技术参数
Technical parameters

型号 Model	37685	37688
气动输油泵比率 Pneumatic pump ratio	5: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	320L/min	330L/min
输送速度 Flow rate	18L/min	27L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	240SAE	240SAE
支架孔径 Wall-bracket diameter	43mm	54mm
吸油软管管长 Length of suction hose	2m	2m
吸油软管管径 Diameter of suction hose	1"	1"
吸油硬管管长 Length of pumping tube	940mm	940mm
吸油硬管管径 Diameter of pumping tube	42mm	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*185*113mm	1130*185*145mm
产品重量 Gross weight	12.3kg	13kg

壁装式注油套件

WALL-MOUNTED OIL TRANSFER KIT

适用于油桶 180-220kg 吸油的壁装式注油套件。
 Equipped with hose reel series and digital oil gun,
 the oil dispensing kit is applied to a drum or tank
 of 180-220 KG.




技术参数
 Technical parameters

型号 Model	37675	37680
气动输油泵比率 Pneumatic pump ratio	5: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	320L/min	320L/min
输送速度 Flow rate	18L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	240SAE	240SAE
吸油管长 Length of pumping tube	940mm	270mm
吸油管径 Diameter of pumping tube	42mm	42mm
注油枪型式 Oil gun series	数显注油枪 Digital oil gun	数显注油枪 Digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量精度 Measuring precision	±0.3%	±0.3%
卷管器型式 Type of hose reel	重型旋转式 Heavy-duty rotary type	重型旋转式 Heavy-duty rotary type
卷管器出油管长 Length of outlet reelpipe	10m	10m
卷管器进油管长 Length of inlet reelpipe	1.5m	1.5m
卷管器管径 Diameter of reelpipe	3/8"	3/8"
挂枪架 Oil gun bracket	150*210*605mm	150*210*605mm
支架孔径 Wall-bracket diameter	-	43mm
吸油软管管长 Length of suction hose	-	2m
吸油软管管径 Diameter of suction hose	-	1"
吸油硬管管长 Length of pumping tube	-	940mm
吸油硬管管径 Diameter of pumping tube	-	42mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	565*545*245mm	565*545*245mm
包装尺寸2 Packing size_2	1325*300*155mm	1325*300*155mm
产品重量 Gross weight	38.5kg	41.8kg

手拖车式注油套件

MOBILE OIL TRANSFER KIT

适用于20-60kg 油桶吸油的手拖车式注油套件。
 Equipped with trolley and digital oil gun,
 the oil dispensing kit is applied to a drum
 or tank of 50~60 KG.

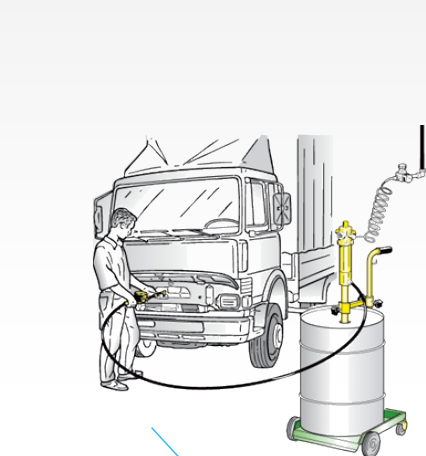


技术参数
 Technical parameters

型号 Model	37500	37550	37500C	37550C
气动输油泵比率 Pneumatic pump ratio	3: 1	5: 1	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	300L/min	320L/min	300L/min	320L/min
输送速度 Flow rate	14L/min	18L/min	12L/min	16L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	130SAE	240SAE	130SAE	240SAE
吸油管长 Length of pumping tube	740mm	740mm	400mm	400mm
吸油管径 Diameter of pumping tube	42mm	42mm	32mm	32mm
注油枪型式 Oil gun series	数显注油枪 Digital oil gun	数显注油枪 Digital oil gun	数显注油枪 Digital oil gun	数显注油枪 Digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量精度 Measuring precision	±0.3%	±0.3%	±0.3%	±0.3%
拖车适用油桶 Suitable for drums	18-60L	18-60L	18-60L	18-60L
输油软管管长 Length of filling hose	4m	4m	4m	4m
输油软管管径 Diameter of filling hose	3/8"	3/8"	3/8"	3/8"
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	545*495*195mm	545*495*195mm	855*605*210mm	855*605*210mm
包装尺寸2 Packing size_2	1125*185*150mm	1125*185*150mm	1130*185*145mm	1125*185*150mm
产品重量 Gross weight	21.2kg	21.9kg	20.3kg	21.2kg


重型移动式注油套件

HEAVY-DUTY MOBILE OIL TRANSFER KIT

适用于180-220kg 油桶吸油的手拖车式注油套件。
Equipped with digital oil gun, hose reel and trolley, the oil dispensing kit is applied to a drum or tank of 180~220 KG.

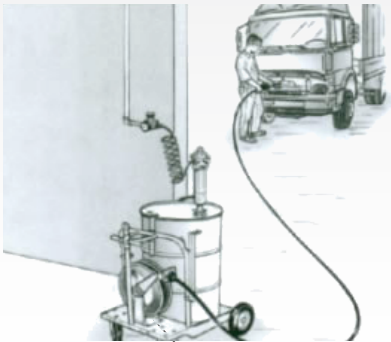

技术参数
Technical parameters

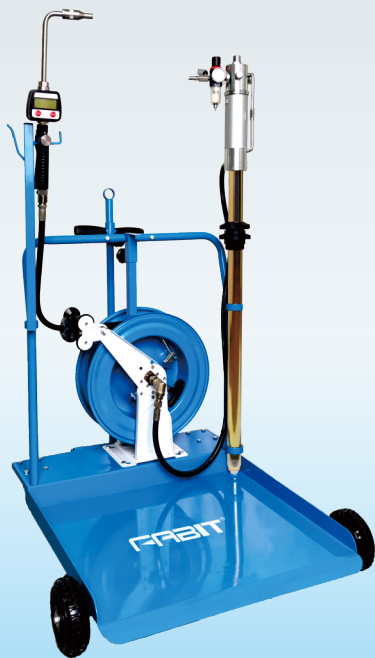

型号 Model	37100	37101	37210	37211	37150	37151	37200	37201
气动输油泵比率 Pneumatic pump ratio	5: 1	5: 1	3: 1	3: 1	5: 1	5: 1	3: 1	3: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar	8bar	8bar	8bar	8bar
耗气量 Average air consumption	320L/min	320L/min	300L/min	300L/min	320L/min	320L/min	300L/min	300L/min
输送速度 Flow rate	18L/min	18L/min	14L/min	14L/min	18L/min	18L/min	14L/min	14L/min
油温 Fluid temperature	-10-60℃	-10-60℃	-10-60℃	-10-60℃	-10-60℃	-10-60℃	-10-60℃	-10-60℃
油品粘度 Max deliverable oil viscosity	240SAE	240SAE	130SAE	130SAE	240SAE	240SAE	130SAE	130SAE
吸油管长 Length of pumping tube	940mm	940mm	940mm	940mm	940mm	940mm	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm	42mm	42mm	42mm	42mm	42mm	42mm
注油枪型式 Oil gun series	数显注油枪 Digital oil gun	预设定注油枪 Pre-set digital oil gun	数显注油枪 Digital oil gun	预设定注油枪 Pre-set digital oil gun	数显注油枪 Digital oil gun	预设定注油枪 Pre-set digital oil gun	数显注油枪 Digital oil gun	预设定注油枪 Pre-set digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量精度 Measuring precision	±0.3%	±0.3%	±0.3%	±0.3%	±0.3%	±0.3%	±0.3%	±0.3%
卷管器型式 Type of hose reel	重型固定式 Heavy-duty fixed type	重型固定式 Heavy-duty fixed type	重型固定式 Heavy-duty fixed type	重型固定式 Heavy-duty fixed type	-	-	-	-
卷管器出油管长 Length of outlet reelpipe	10m	10m	10m	10m	-	-	-	-
卷管器进油管长 Length of inlet reelpipe	1.5m	1.5m	1.5m	1.5m	-	-	-	-
卷管器管径 Diameter of reelpipe	3/8"	3/8"	3/8"	3/8"	-	-	-	-
拖车适用油桶 Suitable for drums	180-220L	180-220L	180-220L	180-220L	180-220L	180-220L	180-220L	180-220L
输油软管管长 Length of filling hose	-	-	4m	4m	4m	4m	4m	4m
输油软管管径 Diameter of filling hose	-	-	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
联网功能 networking function	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version	单机版 Stand-alone version
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	870*865*120mm	870*865*120mm	875*705*120mm	875*705*120mm	875*705*120mm	875*705*120mm	875*705*120mm	875*705*120mm
包装尺寸2 Packing size_2	565*545*245mm	565*545*245mm	565*545*245mm	565*545*245mm	1340*185*180mm	1340*185*180mm	1340*185*180mm	1340*185*180mm
包装尺寸3 Packing size_3	1350*185*145mm	1350*185*145mm	1340*185*180mm	1340*185*180mm	-	-	-	-
产品重量 Gross weight	55kg	55kg	54.5kg	54.5kg	34.2kg	34.2kg	33.3kg	33.3kg

智能网联注油套件

INTELLIGENT NETWORK OIL FILLING KIT

实现手机、电脑远程管理，适用于180-220kg 油桶吸油的手拖车式注油套件。
 Realize mobile phone, computer remote management, suitable for 180-220kg oil drum suction hand trailer type oil injection kit.




技术参数
 Technical parameters

型号 Model	37159	37209
气动输油泵比率 Pneumatic pump ratio	5: 1	3: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	320L/min	300L/min
输送速度 Flow rate	18L/min	14L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	240SAE	130SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
注油枪型式 Oil gun series	预设定注油枪 Pre-set digital oil gun	预设定注油枪 Pre-set digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量精度 Measuring precision	±0.3%	±0.3%
卷管器型式 Type of hose reel	-	-
卷管器出油管长 Length of outlet reelpipe	-	-
卷管器进油管长 Length of inlet reelpipe	-	-
卷管器管径 Diameter of reelpipe	-	-
拖车适用油桶 Suitable for drums	180-220L	180-220L
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	3/8"	3/8"
联网功能 networking function	联网版 network version	联网版 network version
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	875*705*120mm	875*705*120mm
包装尺寸2 Packing size_2	1340*185*180mm	1340*185*180mm
包装尺寸3 Packing size_3	-	-
产品重量 Gross weight	34.2kg	33.3kg

容器式注油套件

MOBILE OIL DISPENSER KIT

带有可推动的容器、有计量的注油套件。
 The dispenser kit is equipped with movable tank, air-operated pump and digital oil gun.

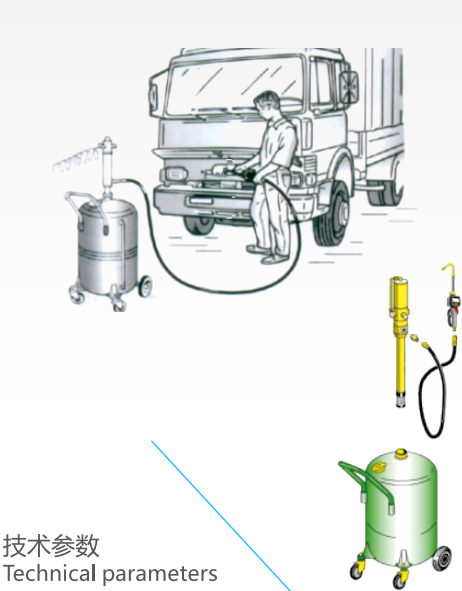

技术参数
 Technical parameters

型号 Model	37073	37173	37670	37770
气动输油泵比率 Pneumatic pump ratio	3: 1	5: 1	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar	8bar	8bar
耗气量 Average air consumption	300L/min	320L/min	300L/min	320L/min
输送速度 Flow rate	14L/min	18L/min	14L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	130SAE	240SAE	130SAE	240SAE
吸油管长 Length of pumping tube	740mm	740mm	740mm	740mm
吸油管径 Diameter of pumping tube	42mm	42mm	42mm	42mm
注油枪型式 Oil gun series	数显注油枪	数显注油枪	普通注油枪	普通注油枪
注油枪咀型式 Type of oil gun nozzle	自动开闭型	自动开闭型	自动开闭型	自动开闭型
计量精度 Measuring precision	±0.3%	±0.3%	-	-
输油软管管长 Length of filling hose	4m	4m	4m	4m
输油软管管径 Diameter of filling hose	3/8"	3/8"	3/8"	3/8"
罐体容量 Tank capacity	72L	72L	72L	72L
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	595*490*875mm	595*490*875mm	485*485*870mm	485*485*870mm
包装尺寸2 Packing size_2	1345*190*155mm	1345*190*155mm	1130*185*150mm	1130*185*150mm
产品重量 Gross weight	29kg	30kg	28.5kg	29.5kg

油槽注油泵套件

OIL DISPENSING PUMP KIT

用于连接油槽的油泵套件。
This pump kit is used for connecting with oil groove.




技术参数
Technical parameters

型号 Model	37695	37696
气动输油泵比率 Pneumatic pump ratio	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	320L/min
输送速度 Flow rate	14L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	130SAE	240SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
输油软管管长 Length of filling hose	4m	4m
输油软管管径 Diameter of filling hose	3/8"	3/8"
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	8.7kg	8.7kg

油槽式接油套件

OIL BAR DISPENSER KIT

从油阀直接接油的套件，可装置一个或多个油阀，输出不同液体。
The oil bar kit is designed to dispense oil / or similar liquids through the tap valve. Multiple taps can be configured as needed.

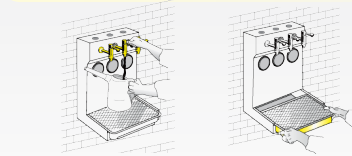


型号 Model	37690	37790	37890
最大轴承 MAX air working pressure	70bar	70bar	70bar
接头 Connector	1/2"	1/2"	1/2"
计量精度 Measuring precision	-	±0.3%	±0.3%
计量表 Meter of measurement	-	数显	预设定
最大流量 MAX flow rate	50L/min	35L/min	35L/min
出油口 Fluid outlet	1/2"	1/2"	1/2"
进油口 Fluid inlet	13mm	13mm	13mm
连接软管管径 Diameter of coupling hose	1/2"	1/2"	1/2"
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	530*450*620mm	530*450*620mm	530*450*620mm
产品重量 Gross weight	14.5kg	15kg	15kg

简易式接油套件

DRUM OIL BAR

从插在大油桶（箱）上的泵直接接油的简易套件。
The oil pump kit is ideal for dispensing fluids directly through the tap valve from the containers of different capacities.

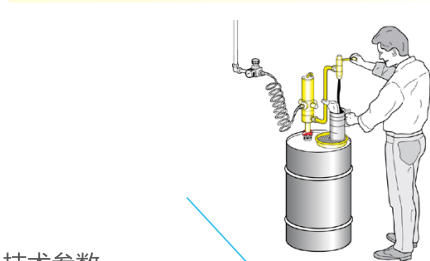

技术参数
Technical parameters

型号 Model	37803	37805
气动输油泵比率 Pneumatic pump ratio	3: 1	5: 1
进气嘴接头 Air inlet connection	1/4"	1/4"
出油口接头 Fluid outlet connection	1/2"	1/2"
工作压力 Air working pressure	5-8bar	5-8bar
最大压力 Maximum pressure	8bar	8bar
耗气量 Average air consumption	300L/min	320L/min
输送速度 Flow rate	14L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	130SAE	240SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	42mm	42mm
出油口 Fluid outlet	1/2"	1/2"
进油口 Fluid inlet	13mm	13mm
包装形式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	1345*190*155mm	1345*190*155mm
产品重量 Gross weight	8.7kg	9.7kg

便携式电动注油套件

PORTABLE ELECTRIC OIL FILLING KIT

迷你精致，可方便携带便于操作的电动注油套件。
Compact and exquisite, easy to carry and operate electric oil filling kit.



型号 Model	39208	39308
工作电压 Operating voltage	220V 50Hz	220V 50Hz
电机功率 Power of motor	200W	200W
出油口接头 Oil outlet connector	1/2"	1/2"
输送速度 Flow rate	8L/min	8L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	90SAE	90SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	19mm	19mm
注油枪型式 Type of oil gun	数显注油枪 Digital oil gun	预设定注油枪 Pre-set digital oil gun
注油枪咀型式 Type of oil gun nozzle	自动打开型 Automatic open type	自动打开型 Automatic open type
计量精度 Metering accuracy	±0.5%	±0.5%
拖车适用油桶 Oil drum for trailer	60-220L	60-220L
输油软管长度 Length of fuel delivery hose	3m	3m
输油软管管径 Diameter of oil delivery hose	1/2"	1/2"
包装型式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size 1	400*300*260mm	400*300*260mm
产品重量 Gross weight	8.7kg	8.8kg

简易式电动注油套件

SIMPLE ELECTRIC OIL FILLING KIT

可放在大油桶（箱）上，直接输油的电动注油套件。
Electric oil filling kit can be placed on a large oil barrel (box) to directly pump oil.



型号 Model	39008	39108
工作电压 Operating voltage	220V 50Hz	220V 50Hz
电机功率 Power of motor	200W	200W
出油口接头 Oil outlet connector	1/2"	1/2"
输送速度 Flow rate	8L/min	8L/min
油温 Fluid temperature	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	90SAE	90SAE
吸油管长 Length of pumping tube	940mm	940mm
吸油管径 Diameter of pumping tube	19mm	19mm
计量表 Meter of measurement	-	数显
出油管型式 Type of oil outlet	360° 万向防滴漏	360° 万向防滴漏
计量精度 Metering accuracy	-	±1%
适用油桶 Oil drum for trailer	60-220L	60-220L
包装型式 Package type	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size 1	340*240*215mm	340*240*215mm
产品重量 Gross weight	6kg	6.5kg

智能网联注油套件

INTELLIGENT NETWORK OIL FILLING KIT

实现手机、电脑远程管理,迷你精致，可方便携带便于操作的电动注油套件。
Realize remote management of mobile phones and computers, mini and exquisite, portable and easy-to-operate electric oil filling kit.

型号 Model	39408
工作电压 Operating voltage	220V 50Hz
电机功率 Power of motor	200W
出油口接头 Oil outlet connector	1/2"
输送速度 Flow rate	8L/min
油温 Fluid temperature	-10-60°C
油品粘度 Max deliverable oil viscosity	90SAE
吸油管长 Length of pumping tube	940mm
吸油管径 Diameter of pumping tube	19mm
注油枪型式 Type of oil gun	预设定注油枪
注油枪咀型式 Type of oil gun nozzle	自动打开型
计量精度 Metering accuracy	±0.5%
拖车适用油桶 Oil drum for trailer	60-220L
输油软管长度 Length of fuel delivery hose	3m
输油软管管径 Diameter of oil delivery hose	1/2"
包装型式 Package type	纸箱 Carton
包装尺寸1 Packing size 1	400*300*260mm
产品重量 Gross weight	8.8kg



重型移动式电动注油套件

HEAVY DUTY MOBILE ELECTRIC OIL FILLING KIT

适用于180-220KG油桶吸油的手拖车式电动泵注油套件，更适合大流量、长时间加注。
Trolley electric pump oil filling kit suitable for oil pumping with 180-220KG oil drum.Suitable for applications with large filling volumes and long filling times .




型号 Model	34006	34012	34018
电压 Voltage	220V50Hz	220V50Hz	220V50Hz
电机功率 The motor power	190W	370w	550W
出油口接头 Fluid outlet connection	1/2"	1/2"	1/2"
最大流量 Maximum flow rate	6L/min	12L/min	18L/min
油温 Fluid temperature	-10-60°C	-10-60°C	-10-60°C
油品粘度 Max deliverable oil viscosity	90SAE	90SAE	90SAE
吸油硬管管长 Length of tubing tubing	940mm	940mm	940mm
吸油硬管管径 The length of oil suction pipe diameter	30mm	30mm	30mm
注油枪型式 Type of grease gun	数显注油枪	数显注油枪	数显注油枪
注油枪咀型式 Type of oil gun nozzle	自动打开型	自动打开型	自动打开型
计量精度 Measuring precision	±0.5%	±0.5%	±0.5%
拖车适用油桶 The trailer for oil drum	180-220L	180-220L	180-220L
吸油软管管长 Length of oil suction hose	1.8m	1.8m	1.8m
吸油软管管径 The length of the suction hose diameter	3/4"	3/4"	3/4"
输油软管长度 Length of oil hose	4m	4m	4m
输油软管管径 Length of oil hose pipe	3/8"	1/2"	1/2"
包装型式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸1 Packing size_1	950*710*250mm	950*710*250mm	950*710*250mm
包装尺寸2 Packing size_2	875*705*120mm	875*705*120mm	875*705*120mm
产品质量 Gross weight	40kg	40kg	41.2kg

数显计量注油枪

DIGITAL METERING OIL INJECTING GUN

带有数显计量的注油枪，最适合连接3：1和5：1 油泵，不建议连接1：1 油泵。
Equipped with digital oil gauge, the oil gun is suggested to use with oil pump (RATIO 3:1 or 5:1), not good for RATIO 1:1 pump.

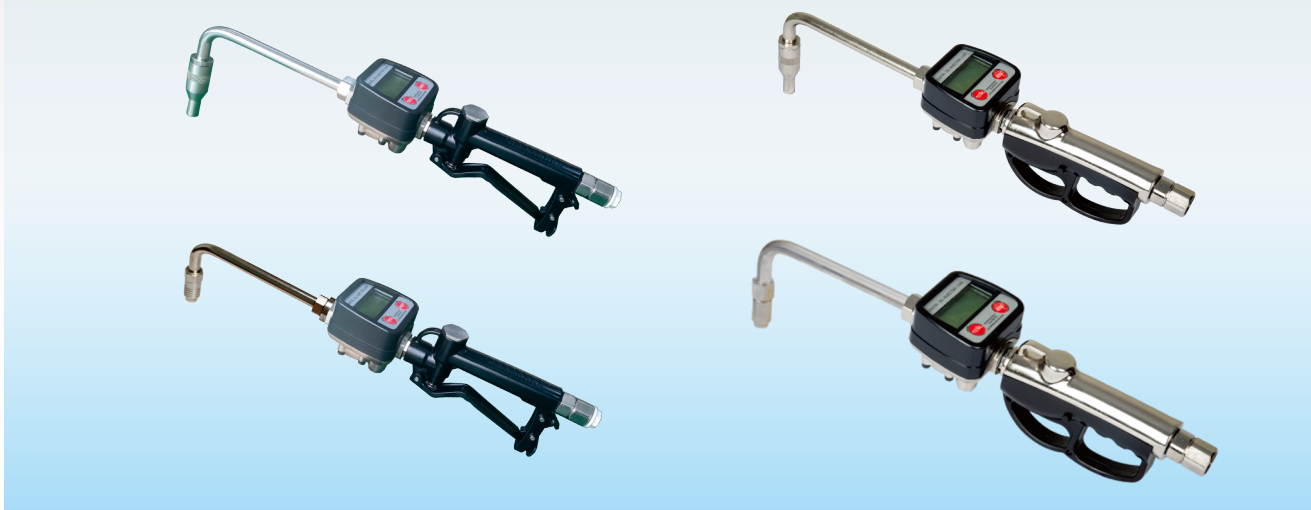

型号 Model	37713	37716	37718
注油咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动打开型 Automatic drip-catcher nozzle
计量表 Digital oil gauge	数显 Digital counter	数显 Digital counter	数显 Digital counter
最大承压 MAX air working pressure	70bar	70bar	70bar
接头 Inlet swivel joint	1/2"	1/2"	1/2"
计量精度 Measuring precision	±0.3%	±0.3%	±0.3%
最大流量 MAX flow rate	35L/min	35L/min	35L/min
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	340*195*120mm	340*195*120mm	340*195*120mm
产品重量 Gross weight	1.7kg	1.7kg	1.7kg

流量计量表

DIGITAL OIL GAUGE

可安装于油枪、油泵或管道上的流量计量表。
Flow meters that can be installed on oil guns, oil pumps or pipelines.

技术参数
Technical parameters

型号 Model	37714
最大承压 MAX air working pressure	70bar
接头 Inlet swivel joint	1/2"
计量精度 Measuring precision	±0.3%
最大流量 MAX flow rate	35L/min
显示屏 Display screen	液晶显示 LCD



加注油枪

OIL INJECTING GUN

分别适合各种油泵的流量的加注枪
The oil gun is suitable for the oil pumps with different flow rates.

技术参数
Technical parameters

型号 Model	38025	38125	38325
注油咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动打开型 Automatic drip-catcher nozzle
最大承压 MAX air working pressure	100bar	100bar	100bar
接头 Connector	1/2"	1/2"	1/2"
最大流量 MAX flow rate	40L/min	40L/min	60L/min
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	260*150*50mm	260*150*50mm	260*150*50mm
产品重量 Gross weight	1kg	1kg	1kg



数显预设计量注油枪

DIGITAL PRESET METERING OIL GUN

可在枪上对注油量进行设定、控制的注油枪。
Oil injecting gun that can set and control the amount of lubricant.

技术参数
Technical parameters

型号 Model	37717	37727	37737
控制形式 control type	自设定 self-setting	密码设定 Password setting	联网控制 Network control
注油咀型式 Type of oil gun nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle	自动开闭型 Automatic drip-catcher nozzle
计量表 Digital oil gauge	预设 preset	预设 preset	预设 preset
最大承压 MAX air working pressure	70bar	70bar	70bar
接头 Inlet swivel joint	1/2"	1/2"	1/2"
计量精度 Measuring precision	±0.3%	±0.3%	±0.3%
最大流量 MAX flow rate	30L/min	30L/min	30L/min
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	290*170*150mm	290*170*150mm	290*170*150mm
产品重量 Gross weight	1.8kg	1.8kg	1.8kg



油桶拖车

DRUM TROLLEY

可调节支架，适合20-220kg油桶的各式拖车。
Adjustable bracket, suitable for all kinds of trolley with 20-220kg oil drums.



型号 Model	80040	80050	80060	80200	80201
适用油桶 Suitable for drums	18-60L	18-60L	18-60L	180-220L	180-220L
固定轮 Fixed wheels	2个	2个	2个	2个	2个
万向轮 Universal wheels	2个	2个	2个	2个	2个
底座尺寸 Baseplate dimension	400*400mm	400*400mm	460*320mm	690*600mm	690*600mm
包装形式 Package type	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton	纸箱 Carton
包装尺寸 Packing size	540*490*190mm	540*490*190mm	850*605*205mm	870*700*115mm	870*865*120mm
产品重量 Gross weight	9.5kg	10.5kg	9.7kg	22kg	25kg

油桶运输车

TROLLEY FOR HEAVY-DUTY DRUMS


适合 180-300kg 油桶的运输作业搬运车。
Trolleys are applied to operated 180~300 KG drums.



型号 Model	81200	81300	81500
搬运重量 Suitable for drums	180-220kg	180-300kg	180-300kg
升举高度 Lifting height	100mm	1500mm	1500mm
其他功能 Other feature	-	-	翻转油桶 Hydraulic turning

自锁加油枪头

SELF-LOCKING OIL GUN NOZZLE

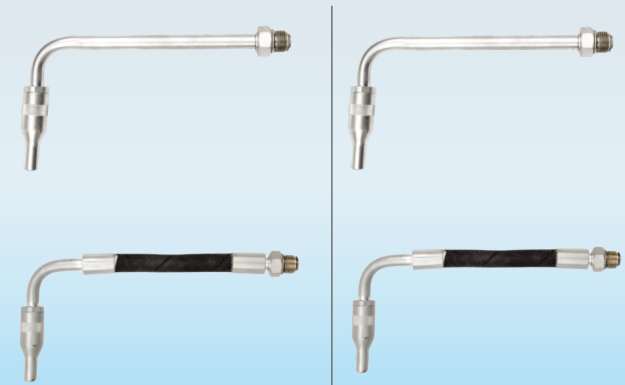

型号 Model 38110 38112

38111 38113

手动锁加油枪头

MANUAL OIL GUN NOZZLE



型号 Model 38010

38011




型号 Model 38012 38016

38013 38017

注油枪旋转接头

SWIVEL JOINT FOR OIL GUN

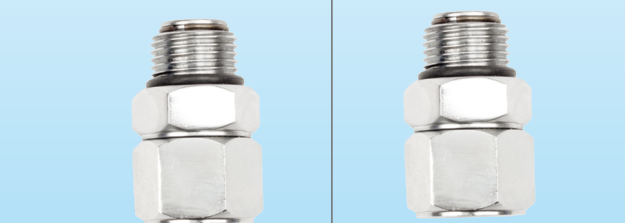

型号 Model 38062

38063

稳压杯套件

STABILIZER CUP



型号 Model

38060

带接头的3/8" 输油软管套件

OIL HOSE KIT WITH 3/8" COUPLINGS



型号 Model

91201

91204

91202

91205

91203

91206

91208

91210

带接头的1/2"输油软管套件

OIL HOSE KIT WITH 1/2" COUPLINGS



型号 Model

91101

91104

91102

91105


91103

91106

91108

91110

挂枪架
OIL GUN BRACKET

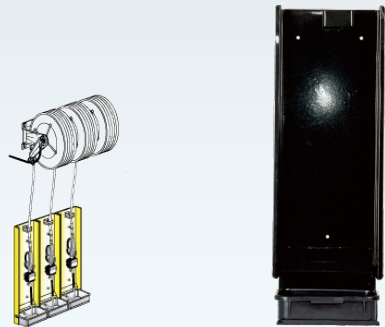


型号 Model 38630

吸油软、硬管
SUCTION HOSE / SUCTION TUBE




型号 Model 38026 38027 38028

空气过滤器套件
AIR FILTER KIT

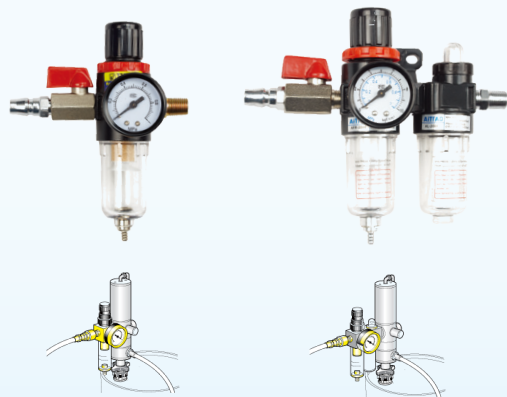

型号 Model 38041 38141

壁装支架
WALL BRACKET

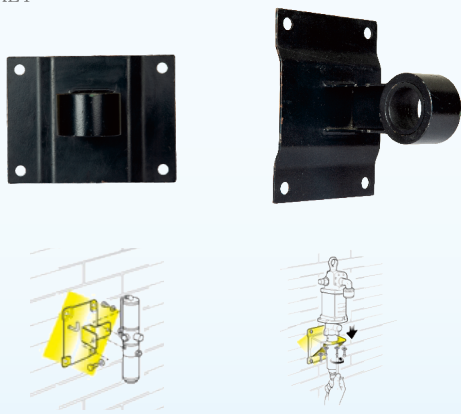

型号 Model 38043 38045

桶孔螺母
BARREL NUT ADAPTOR




型号 Model 38030 38042 38044

壁装支架套件接头
WALL BRACKET KIT CONNECTOR



型号 Model 38047 38048

吸油底阀
OIL SUCTION BOTTOM VALVE



型号 Model 38087 38088 38089

吸油硬管接头
SUCTION TUBE JOINT



型号 Model 38086 38084



CENTRALIZED (CENTRAL) OIL DISTRIBUTION SYSTEM

集中（中央）供油系统

